

Suitability of Amorphous Thin–Film Alloys for Hydrogen Purification

Nayebossadri, Shahrouz; Book, David; Speight, John

DOI:

[10.4172/2155-9589.1000177](https://doi.org/10.4172/2155-9589.1000177)

License:

Creative Commons: Attribution-NonCommercial (CC BY-NC)

Document Version

Publisher's PDF, also known as Version of record

Citation for published version (Harvard):

Nayebossadri, S, Book, D & Speight, J 2017, 'Suitability of Amorphous Thin–Film Alloys for Hydrogen Purification', *Journal of Membrane Science & Technology*. <https://doi.org/10.4172/2155-9589.1000177>

[Link to publication on Research at Birmingham portal](#)

Publisher Rights Statement:

Checked for eligibility: 01/03/2018

General rights

Unless a licence is specified above, all rights (including copyright and moral rights) in this document are retained by the authors and/or the copyright holders. The express permission of the copyright holder must be obtained for any use of this material other than for purposes permitted by law.

- Users may freely distribute the URL that is used to identify this publication.
- Users may download and/or print one copy of the publication from the University of Birmingham research portal for the purpose of private study or non-commercial research.
- User may use extracts from the document in line with the concept of 'fair dealing' under the Copyright, Designs and Patents Act 1988 (?)
- Users may not further distribute the material nor use it for the purposes of commercial gain.

Where a licence is displayed above, please note the terms and conditions of the licence govern your use of this document.

When citing, please reference the published version.

Take down policy

While the University of Birmingham exercises care and attention in making items available there are rare occasions when an item has been uploaded in error or has been deemed to be commercially or otherwise sensitive.

If you believe that this is the case for this document, please contact UBIRA@lists.bham.ac.uk providing details and we will remove access to the work immediately and investigate.

Suitability of Amorphous Thin – Film Alloys for Hydrogen Purification

Shahrouz Nayebossadri*, John D. Speight and David Book

School of Metallurgy and Materials, University of Birmingham, Edgbaston, Birmingham, B15 2TT, UK

*Corresponding author: Shahrouz Nayebossadri, School of Metallurgy and Materials, University of Birmingham, Edgbaston, Birmingham, B15 2TT, UK, Tel: (+44) (0) 121 414 5213; E-mail: s.nayebossadri@bham.ac.uk

Received date: November 28, 2017; Accepted date: November 28, 2017; Published date: December 27, 2017

Copyright: © 2018 Nayebossadri S, et al. This is an open-access article distributed under the terms of the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original author and source are credited.

Introduction

Hydrogen separation membranes combined with Steam Methane Reforming (SMR) or Coal Gasification (CG) could provide a high volume of ultra-high purity hydrogen provided that the cost of separation membranes is reduced in line with US DoE targets [1]. Dense metallic membranes used for hydrogen purification are dominantly based on Pd and Pd alloys [2,3]. However, the application of Pd and Pd alloy membranes for large-scale hydrogen purification is too expensive [1]. In addition to the high cost of Pd, the susceptibility to hydrogen embrittlement [4] and surface poisoning by impurity gases such as CO₂, CO and H₂S [5], encourage searching for alternative hydrogen separation materials.

Amorphous alloys have been investigated as potential hydrogen purification membranes because of their good mechanical properties, corrosion resistance, higher resistance to hydrogen embrittlement, and significantly lower cost [6]. Some of the amorphous zirconium and nickel-based alloys have been shown by computational [7,8] and experimental studies [7,9] to have hydrogen permeability values close to that of Pd. For example, (Ni_{0.6}Nb_{0.4})₇₀Zr₃₀ alloy showed comparable hydrogen permeability to Pd ($1.3 \times 10^{-8} \text{ mol m}^{-1} \text{ s}^{-1} \text{ Pa}^{-0.5}$ at 400°C) while offering acceptable surface catalytic activity for hydrogen dissociation/recombination. The hydrogen permeability in this alloy showed to increase by increasing the Zr content, but forming a less thermally stable alloy [9,10]. Zr₅₄Cu₄₆ and Zr₃₀Cu₆₀X₁₀ (X=Sc, Ta, Y,

and Ti) alloys were also computationally predicted to offer higher hydrogen permeability than Pd [11,12]. However, the surface oxidation could significantly lower the hydrogen permeability in these alloys [13].

In general, higher hydrogen solubility is seen in amorphous alloys due to an increased in the population of defective sites suitable for hydrogen occupation [14]. Unlike the crystalline materials, hydrogen diffusivity in amorphous materials depends on the hydrogen concentration. This attributes to the existence of hydrogen occupation sites with different binding energies. Initially, hydrogen mobility is low due to the occupation of high-energy sites with higher hydrogen affinity. As hydrogen concentration increases and high-energy sites are filled, hydrogen atoms will occupy low-energy sites, which results in a higher mobility as hydrogen is not strongly bound to this sites [15].

Fabrication of thinner membrane can significantly improve the hydrogen diffusion in membranes and therefore achieving a higher permeability. Amorphous membranes with thicknesses of 30 to 50 μm [16] were successfully fabricated by melt spinning. We also recently demonstrated [17] the possibility to fabricate dense binary and ternary Zr-based amorphous thin-films (less than 10 micron) by the Closed Field Unbalanced Magnetron Sputtering Ion Plating (CFUMSIP) (Figure 1). Using this method, we could produce amorphous thin-films in a wider compositional range with a better control over the size, shape and thickness of the films.

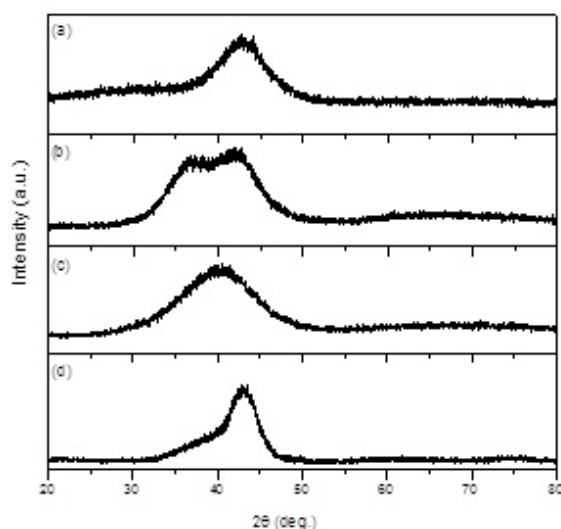


Figure 1: XRD patterns of (a) Zr_{40.5}Ni_{59.5}, (b) Zr_{56.2}Cu_{43.8}, (c) Zr₃₀Cu_{57.7}Y_{12.3}, and (d) Zr₃₂Cu_{57.3}Ti_{10.7} thin-films fabricated by CFUMSIP system (right picture).

The metastable thermodynamic state of amorphous membranes imposes temperature limitation during the amorphous membranes operation. Crystallisation can occur in amorphous membranes at high temperatures during the operation and even below the theoretical crystallisation temperature if kept for a long time [18]. Upon crystallisation, alloys will lose their resistance to hydrogen embrittlement followed by a substantial decrease in the alloy's hydrogen permeability. We noticed [19] that thermal stability of the fabricated thin-films is mainly dominated by the alloys composition rather than the fabrication route. However, the crystallisation process in these films seemed to be different compared to bulk materials. Alloys were particularly sensitive to the oxidation and amorphous phase decomposition during structural analysis under inert and hydrogen atmospheres. As a result, phase separation was substantial in the case of Cu and Ni in the $Zr_{56.2}Cu_{43.8}$ and $Zr_{40.5}Ni_{59.5}$ sputtered thin-film alloys. Cu and Ni phase separation could effectively alter the local atomic structure, hence affecting the crystallisation thermodynamic. An effective method to reduce the level of Cu phase separation was [19] to fabricate $Zr_{30}Cu_{57.7}Y_{12.3}$, and $Zr_{32}Cu_{57.3}Ti_{10.7}$ ternary amorphous thin-films. However, the kinetic studies revealed that the atomic size mismatch of Y and Ti in these ternary alloys may change the local atomic microstructure and reduce the atomic packing density. Thermal behaviour of amorphous alloys strongly depends on the existence of the Short Range Order (SRO) metastable icosahedra-like clusters with highest atomic packing density. The formation of crystal like structure was encouraged in the $Zr_{30}Cu_{57.7}Y_{12.3}$, and $Zr_{32}Cu_{57.3}Ti_{10.7}$ ternary amorphous thin-films, which could act as nucleation sites and therefore reducing the thermal stability of the alloys.

Although, some amorphous binary and ternary Zr-based alloys proposed to offer a comparable hydrogen permeability to Pd, oxidation, phase separation and the lack of thermal stability, especially under hydrogen, can hinder the application of amorphous thin-film membranes. The suitability of amorphous thin-films (and even bulk alloys) as potential hydrogen purification membranes can be better judged after more careful studies on the crystallisation mechanism and thermal stability controlling factors under hydrogen.

References

1. Criscuoli A, Basile A, Drioli E, Loiacono O (2001) An economic feasibility study for water gas shift membrane reactor. *J Memb Sci* 181: 21–27.
2. Uemiya S (2004) Brief review of steam reforming using a metal membrane reactor. *Top Catal* 29: 79–84.
3. Rahimpour MR, Samimi F, Babapoor A, Tohidian T, Mohebi S (2017) Palladium membranes applications in reaction systems for hydrogen separation and purification: A review. *Chem Eng Process Process Intensif* 121: 24–49.
4. Jayaraman V, Lin YSS (1995) Synthesis and hydrogen permeation properties of ultrathin palladium-silver alloy membranes. *J Memb Sci* 104: 251–262.
5. Chen CH, Ma YH (2010) The effect of H₂S on the performance of Pd and Pd/Au composite membrane. *J Memb Sci* 362: 535–544.
6. Dolan MD (2010) Non-Pd BCC alloy membranes for industrial hydrogen separation. *J Memb Sci* 362: 12–28.
7. Dolan M, Dave N, Morpeth L, Donelson R, Liang D, et al. (2009) Ni-based amorphous alloy membranes for hydrogen separation at 400°C. *J Memb Sci* 326: 549–555.
8. Hara S, Sakaki K, Itoh N, Kimura HM, Asami K, et al. (2000) An amorphous alloy membrane without noble metals for gaseous hydrogen separation. *J Memb Sci* 164: 289–294.
9. Kim SM, Chandra D, Pal NK, Dolan MD, Chien WM, et al. (2012) Hydrogen permeability and crystallization kinetics in amorphous Ni-Nb-Zr alloys. *Int J Hydrogen Energy* 37: 3904–3913.
10. Paglieri SN, Pal NK, Dolan MD, Kim SM, Chien WM, et al. (2011) Hydrogen permeability, thermal stability and hydrogen embrittlement of Ni-Nb-Zr and Ni-Nb-Ta-Zr amorphous alloy membranes. *J Memb Sci* 378: 42–50.
11. Hao S, Sholl DS (2011) Computational prediction of durable amorphous metal membranes for H₂ purification. *J Memb Sci* 381: 192–196.
12. Hao S, Sholl DS (2013) Rapid prediction of hydrogen permeation through amorphous metal membranes: an efficient computational screening approach. *Energy Environ Sci* 6: 232.
13. Lai T, Yin H, Laura Lind M (2015) The hydrogen permeability of Cu-Zr binary amorphous metallic membranes and the importance of thermal stability. *J Memb Sci* 489: 264–269.
14. Wipf H (1998) Solubility and Diffusion of Hydrogen in Solid Metals. *Met Forum* 1979, 2, 138–148.
15. dos Santos DS, de Miranda PEV. Hydrogen solubility in amorphous and crystalline materials. *Int J Hydrogen Energy* 23: 1011–1017.
16. Dolan MD, Dave NC, Ilyushechkin AY, Morpeth LD, McLennan KG (2006) Composition and operation of hydrogen-selective amorphous alloy membranes. *J Memb Sci* 285: 30–55.
17. Nayeibossadri S, Smith D, Speight J, Book D (2015) Amorphous Zr-based thin films fabricated by magnetron sputtering for potential application in hydrogen purification. *J Alloys Compd* 645: S56–S60.
18. Ockwig NW, Nenoff TM (2007) Membranes for hydrogen separation. *Chem Rev* 107: 4078–4110.
19. Nayeibossadri S, Greenwood CJ, Speight JD, Book D (2017) Thermal and structural stability of Zr – based amorphous thin films for potential application in hydrogen purification. *Sep Purif Technol* 187: 173–183.